


NTC Thermistor Sensor: NTSA Series

Screw-On Type



Feature

1. Fast and simple screw-on installation
2. RoHS compliant
3. Customizable design (cable lengths, R/T characteristic and connector) is available
4. Agency recognition:
 UL /cUL file no: E138827
 VDE file no: 40025693 (partial parts)
 TUV file no: R50236283

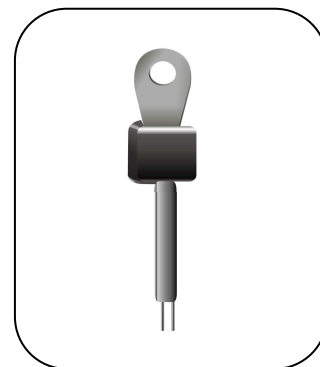


Recommended Applications

1. Power supply
2. UPS
3. Electronic devices

Structure and Dimensions

Type1: M4 terminal

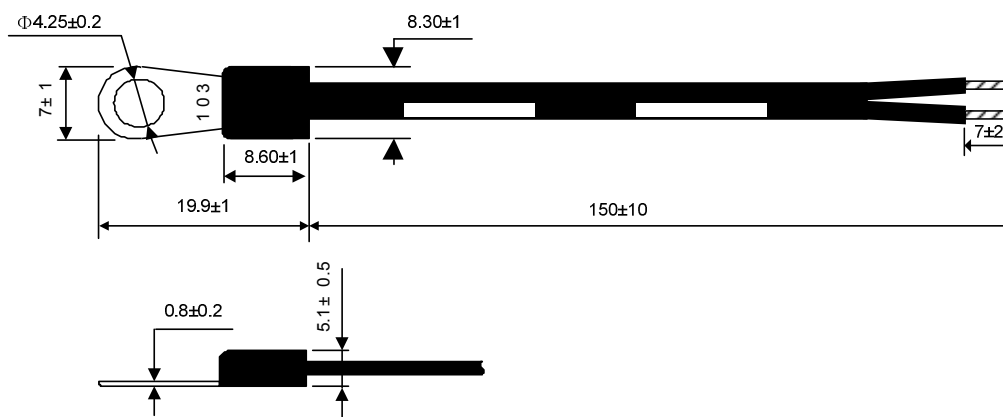


Lead Material	Lead Length	Zero Power Resistance at 25°C (R ₂₅)	B25/50	Thermal Time Constant	Power Rating at 25°C	Operation Temp. Range
	(mm)	(KΩ)	(K)	(sec)	(mw)	(°C)
UL4413 #26x2C TS Black	150±10	10	4050	Approx. 30 (on metal plate)	150	-40~125

NTC Thermistor Sensor: NTSA Series

Screw-On Type




Type 4: M3 terminal + connector

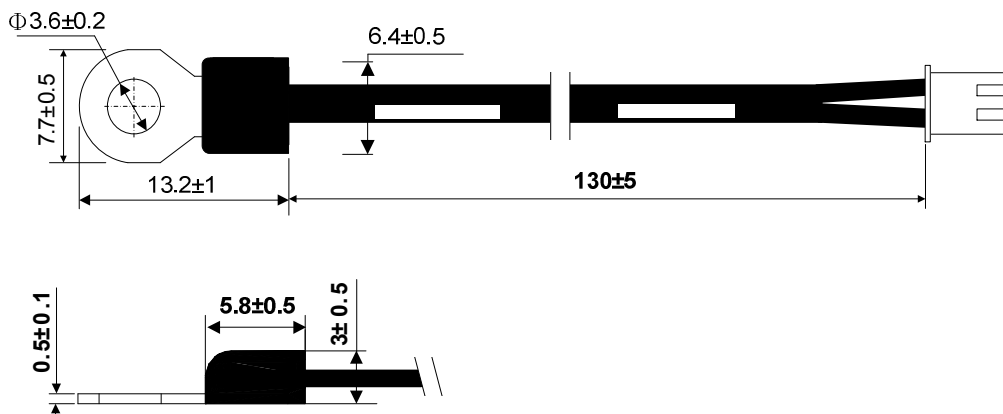

Connector pitch is 2.5mm

Lead Material	Lead Length	Zero Power Resistance at 25°C (R ₂₅)	B25/50	Thermal Time Constant	Power Rating at 25°C	Operation Temp. Range
	(mm)	(KΩ)	(K)	(sec)	(mw)	(°C)
UL2651 #28x2C TS Black	130±5	100	4050	Approx. 30 (on metal plate)	210	-20~+105

Type 5: High temp.

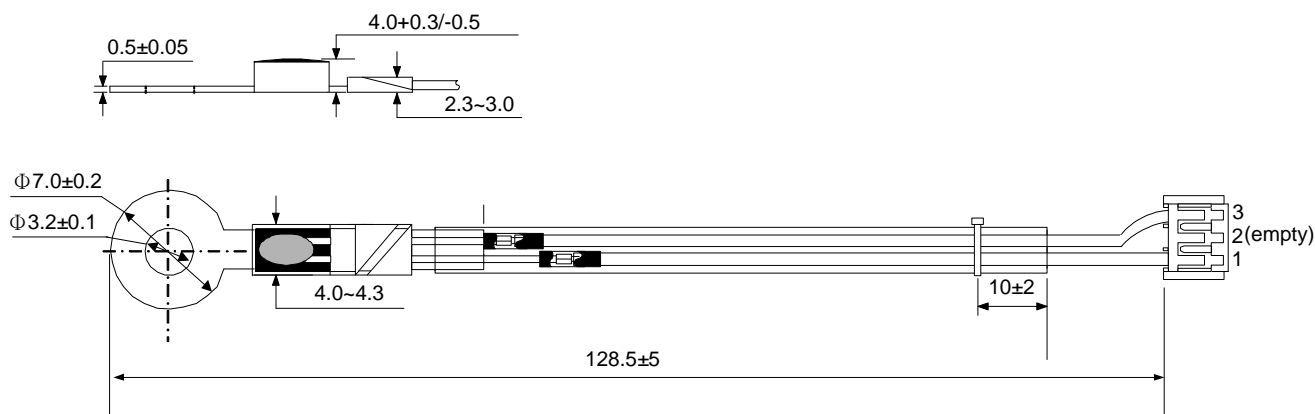

Lead Material	Lead Length	Zero Power Resistance at 25°C (R ₂₅)	B25/50	Thermal Time Constant	Power Rating at 25°C	Operation Temp. Range
	(mm)	(KΩ)	(K)	(sec)	(mw)	(°C)
AWG 22 White (Glass Braid Reinforced Silicone Rubber)	128.5±5	3.3	3970	Approx. 6 (on 100°C metal plate)	70	-20~+150