

Ceramic PTC Thermistor: TPM-S Series



SMD PTC Thermistor for Temperature Sensing

■ Features


1. RoHS & Halogen-free compliant
2. Thermistor chip with lead-free tinned terminals
3. EIA size 0402,0603,0805
4. Fast and reliable response
5. Suitable for reflow soldering
6. Agency Recognition:
7. UL & cUL: File No. E138827
TUV: File No. R50133294




■ Recommended Applications

1. DC/DC converter
2. AC adapter
3. Inverter
4. Overheat protection for transistor and ICs
5. LED

■ Part Number Code

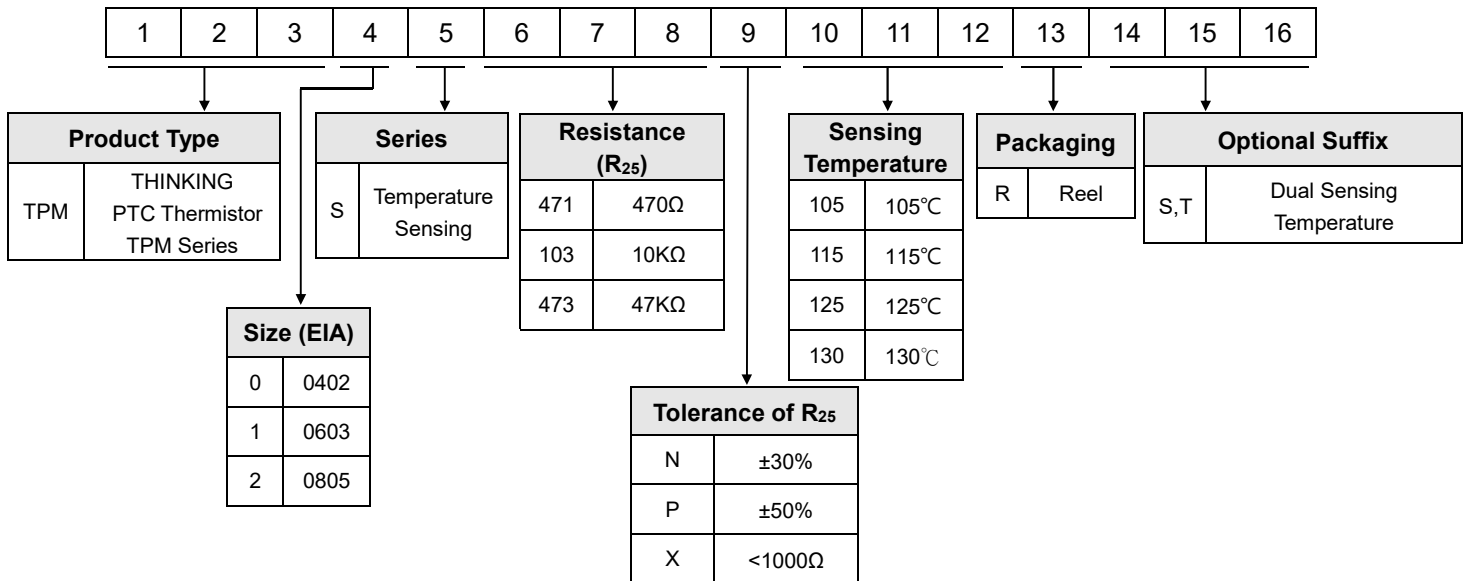

■ Structure and Dimensions

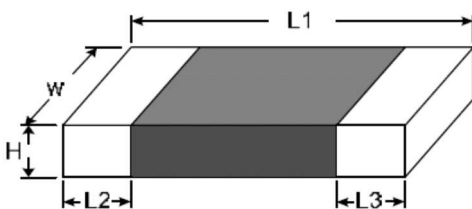

(Unit: mm)

Part No.	Size (EIA)	L1	W	H max.	L2 and L3
TPM0	0402	1.00±0.15	0.50±0.10	0.50±0.10	0.20±0.10
TPM1	0603	1.60±0.15	0.80±0.15	0.80±0.15	0.40±0.20
TPM2	0805	2.00±0.20	1.25±0.20	1.00 max.	0.45±0.25

Ceramic PTC Thermistor: TPM-S Series



SMD PTC Thermistor for Temperature Sensing

■ Electrical Characteristics

0402 Series

Part No.	Zero Power Resistance at 25°C	Sensing Temperature 1 at 4.7 KΩ	Sensing Temperature 2 at 47 KΩ	Max. Voltage	Operating Temperature Range	Safety Approvals	
	R ₂₅	T _{s1}	T _{s2}	V _{max}	T _L ~T _U	UL/ cUL	TUV
	(Ω)	(°C)	(°C)	(V _{DC})	(°C)		
TPM0S471P125R	470	125±5	--	32	-25 ~ +140	√	√
TPM0S541N115RT	540	115±5	135±7		-25 ~ +150	√	

Part No.	Zero Power Resistance at 25°C	Sensing Temperature 1 at 10 KΩ	Sensing Temperature 2 at 100 KΩ	Max. Voltage	Operating Temperature Range	Safety Approvals	
	R ₂₅	T _{s1}	T _{s2}	V _{max}	T _L ~T _U	UL/ cUL	TUV
	(KΩ)	(°C)	(°C)	(V _{DC})	(°C)		
TPM0S102P065RS	1	65±5	80±5	32	-40 ~ +90	√	
TPM0S102P095RS		95±5	110±5		-40 ~ +120	√	
TPM0S102P105RS		105±5	120±5		-40 ~ +130	√	
TPM0S102P115RS		115±5	130±5		-40 ~ +140	√	
TPM0S102P065RT		65±5	80±3		-40 ~ +90	√	
TPM0S102P095RT		95±5	110±3		-40 ~ +120	√	
TPM0S102P105RT		105±5	120±3		-40 ~ +130	√	
TPM0S102P115RT		115±5	130±3		-40 ~ +140	√	

Part No.	Zero Power Resistance at 25°C	Sensing Temperature at 4.7MΩ	Max. Voltage	Operating Temperature Range	Safety Approvals	
	R ₂₅	T _s	V _{max}	T _L ~T _U	UL/ cUL	TUV
	(KΩ)	(°C)	(V _{DC})	(°C)		
TPM0S103P100R	10	100±5	32	-25 ~ +115	√	
TPM0S103P110R		110±5		-25 ~ +125	√	
TPM0S103P130R		130±5		-25 ~ +145	√	

Ceramic PTC Thermistor: TPM-S Series



SMD PTC Thermistor for Temperature Sensing

0603 Series

Part No.	Zero Power Resistance at 25°C	Sensing Temperature at 1KΩ	Max. Voltage	Operating Temperature Range	Safety Approvals	
	R ₂₅	T _{s1}	V _{max}	T _L ~T _U	UL/cUL	TUV
	(Ω)	(°C)	(V _{DC})	(°C)		
TPM1S101N130R	100	130±7	24	-25 ~ +145	√	√

Part No.	Zero Power Resistance at 25°C	Sensing Temperature at 2.2KΩ	Max. Voltage	Operating Temperature Range	Safety Approvals	
	R ₂₅	T _s	V _{max}	T _L ~T _U	UL/cUL	TUV
	(Ω)	(°C)	(V _{DC})	(°C)		
TPM1S221N105R	220	105±7	24	-25 ~ +120	√	

Part No.	Zero Power Resistance at 25°C	Sensing Temperature 1 at 4.7 KΩ	Sensing Temperature 2 at 47 KΩ	Max. Voltage	Operating Temperature Range	Safety Approvals	
	R ₂₅	T _{s1}	T _{s2}	V _{max}	T _L ~T _U	UL/cUL	TUV
	(Ω)	(°C)	(°C)	(V _{DC})	(°C)		
TPM1S471P065R	470	65±5	--	32	-25 ~ +80	√	√
TPM1S471P085R		85±5	--		-25 ~ +100	√	√
TPM1S471P095R		95±5	--		-25 ~ +110	√	√
TPM1S471P105R		105±5	--		-25 ~ +120	√	√
TPM1S471P115R		115±5	--		-25 ~ +130	√	√
TPM1S471P125R		125±5	--		-25 ~ +140	√	√
TPM1S471P135R		135±5	--		-25 ~ +150	√	√
TPM1S471P075RT		75±5	90±7		-25 ~ +100	√	√
TPM1S471P085RT		85±5	100±7		-25 ~ +110	√	√
TPM1S471P095RT		95±5	110±7		-25 ~ +120	√	√
TPM1S471P105RT		105±5	120±7		-25 ~ +130	√	√
TPM1S471P115RT		115±5	130±7		-25 ~ +140	√	√
TPM1S471P125RT		125±5	140±7		-25 ~ +150	√	√
TPM1S471P135RT		135±5	150±7		-25 ~ +160	√	√

Ceramic PTC Thermistor: TPM-S Series



SMD PTC Thermistor for Temperature Sensing

0603 Series

Part No.	Zero Power Resistance at 25°C	Sensing Temperature at 4.7MΩ	Max. Voltage	Operating Temperature Range	Safety Approvals	
	R ₂₅	T _s	V _{max}	T _L ~T _U	UL/cUL	TUV
	(KΩ)	(°C)	(V _{DC})	(°C)		
TPM1S102P105R	1	105±5	32	-25 ~ +120		
TPM1S103P110R		110±5		-25 ~ +125	√	√
TPM1S103P120R		120±5		-25 ~ +135	√	√
TPM1S103P130R		130±5		-25 ~ +145	√	√

0805 Series

Part No.	Zero Power Resistance at 25°C	Sensing Temperature at 4.7 KΩ	Max. Voltage	Operating Temperature Range	Safety Approvals	
	R ₂₅	T _s	V _{max}	T _L ~T _U	UL/cUL	TUV
	(Ω)	(°C)	(V _{DC})	(°C)		
TPM2S471P065R	470	65±5	32	-25 ~ +80	√	√
TPM2S471P085R		85±5		-25 ~ +100	√	√
TPM2S471P095R		95±5		-25 ~ +110	√	√
TPM2S471P105R		105±5		-25 ~ +120	√	√
TPM2S471P115R		115±5		-25 ~ +130	√	√
TPM2S471P125R		125±5		-25 ~ +140	√	√

Part No.	Zero Power Resistance at 25°C	Sensing Temperature	Resistance			Max. Voltage	Operating Temperature Range	Safety Approvals	
	R ₂₅	T _s	T _s -5°C	T _s +5°C	T _s +15°C	V _{max}	T _L ~T _U	UL/cUL	TUV
	(Ω)	(°C)	(KΩ)	(KΩ)	(KΩ)	(V _{DC})	(°C)		
TPM2S681P100R	680	100	≤ 5.5	≥ 13.3	≥ 40	32	-40 ~ +125	√	
TPM2S681P110R		110					-40 ~ +135	√	


Ceramic PTC Thermistor: TPM-S Series




SMD PTC Thermistor for Temperature Sensing

Resistance-Temperature Characteristics (Typical)


SMD 0402 R25=470Ω
TPM0S471P125R

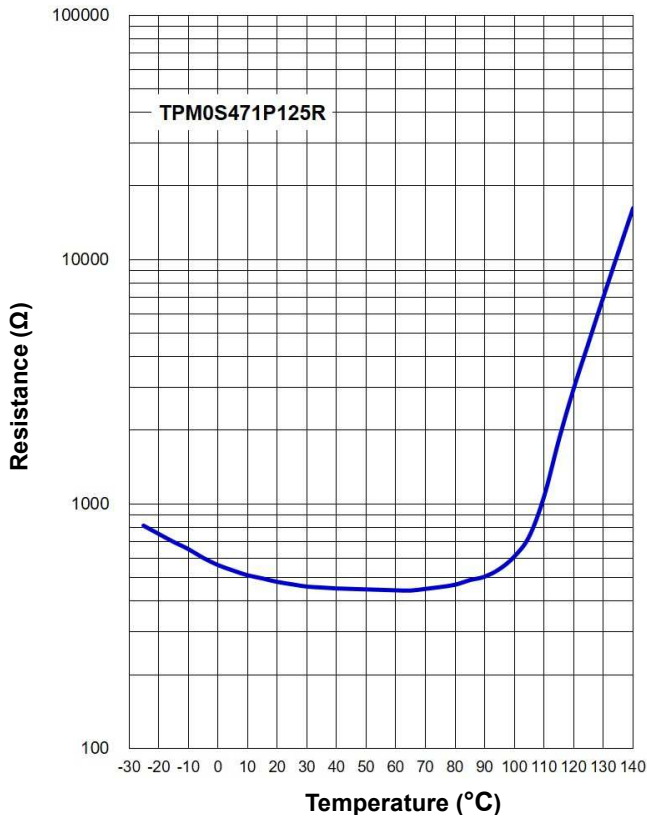


SMD 0402 R25=540Ω
TPM0S541N115RT

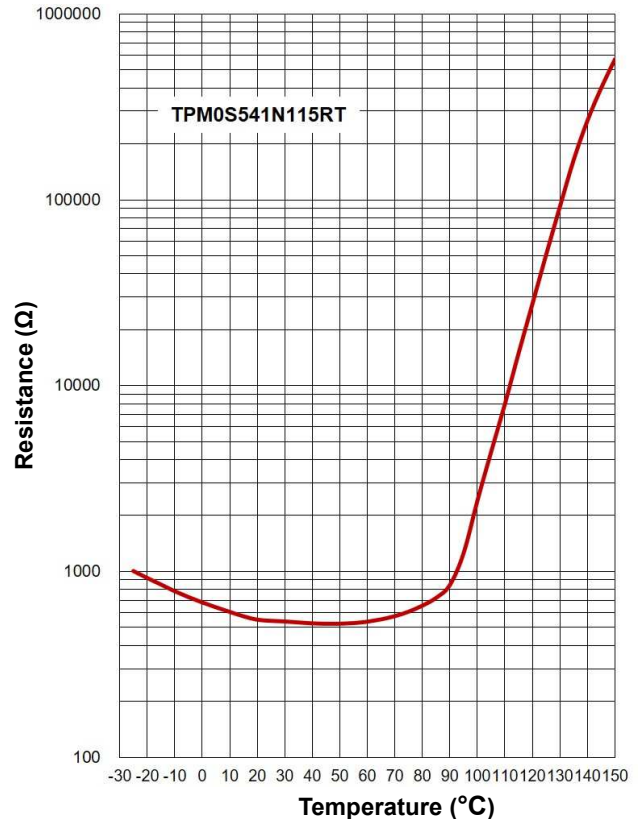

SMD 0402 R25=1KΩ
TPM0S102PXXXRS (RT)

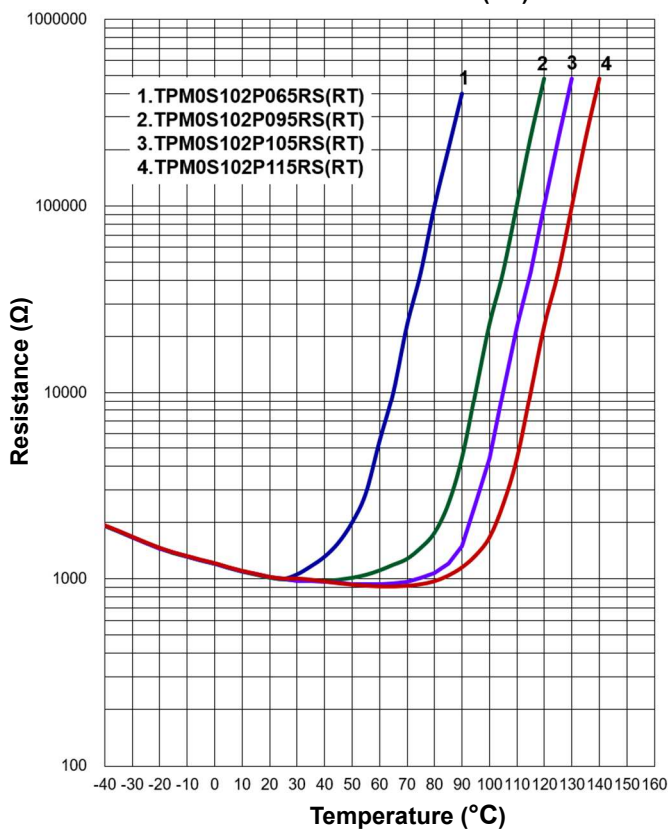

SMD 0402 R25=10KΩ
TPM0S103PXXXR

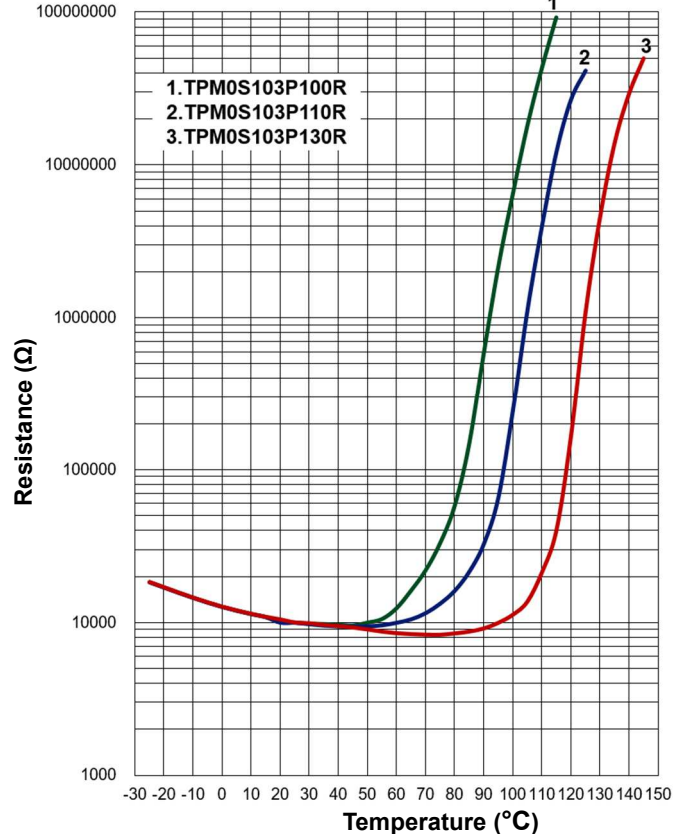


Ceramic PTC Thermistor: TPM-S Series




SMD PTC Thermistor for Temperature Sensing

Resistance-Temperature Characteristics (Typical)


SMD 0603 R25=100Ω
TPM1S101N130R

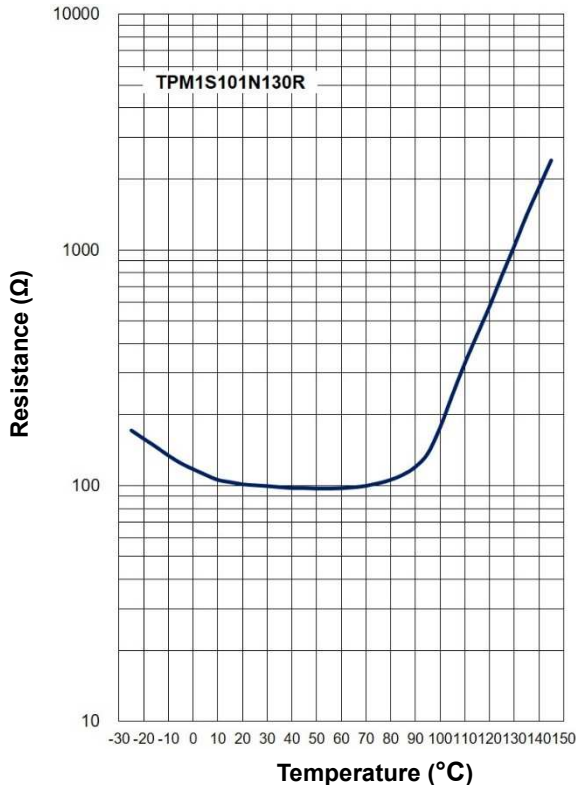


SMD 0603 R25=220Ω
TPM1S221N105R

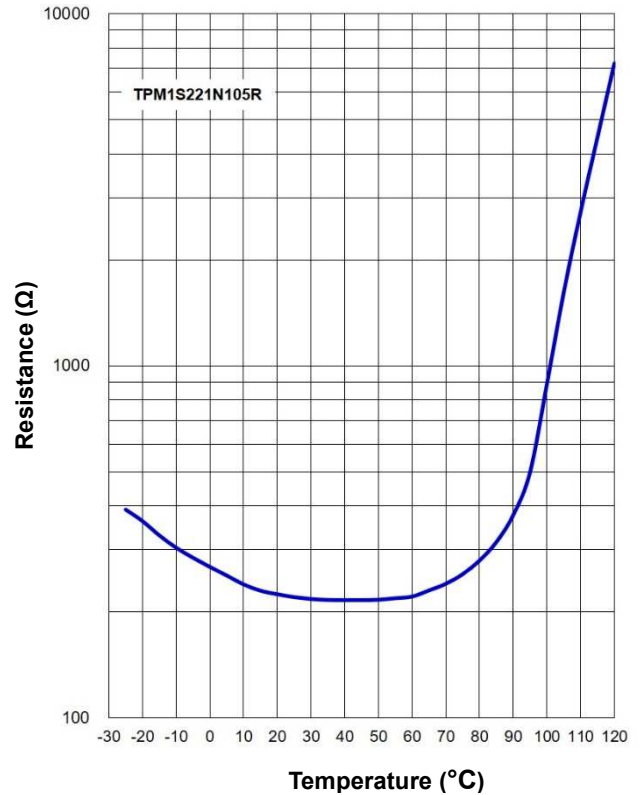

SMD 0603 R25=470Ω
TPM1S471PXXXR

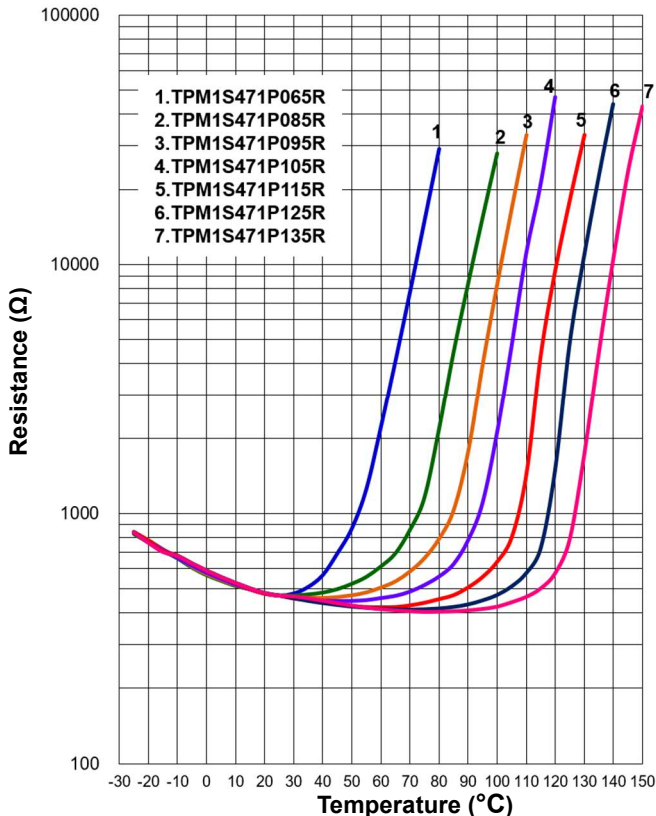

SMD 0603 R25=470Ω
TPM1S471PXXXR

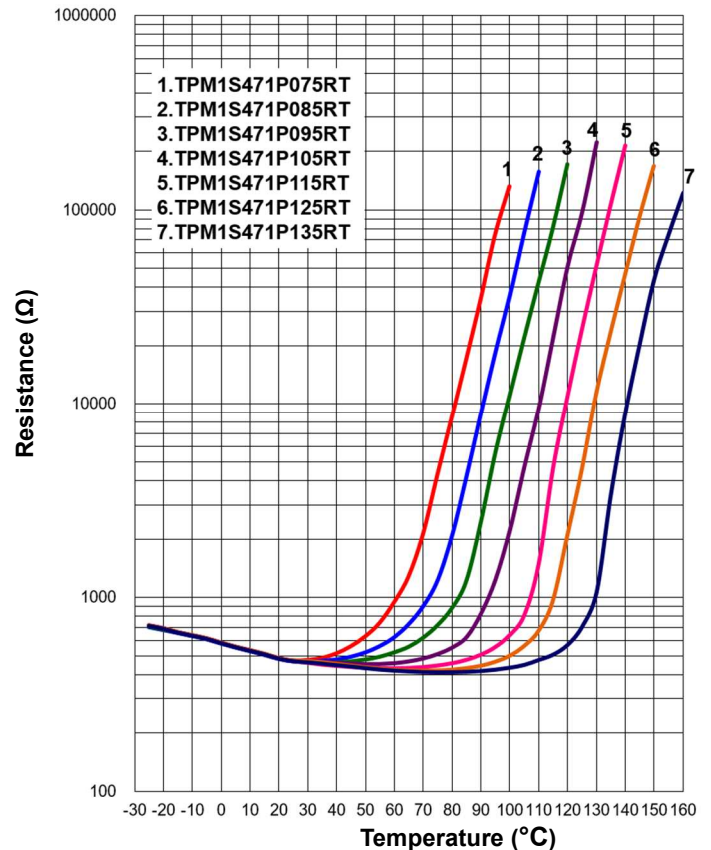


Ceramic PTC Thermistor: TPM-S Series




SMD PTC Thermistor for Temperature Sensing

Resistance-Temperature Characteristics (Typical)


SMD 0603 R25=1KΩ
TPM1S102P105R

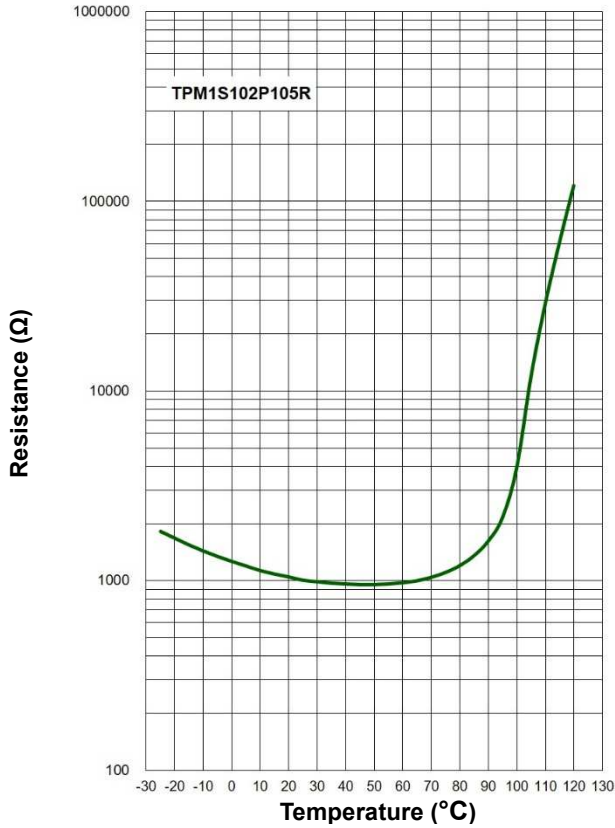


SMD 0603 R25=10KΩ
TPM1S103PXXXR

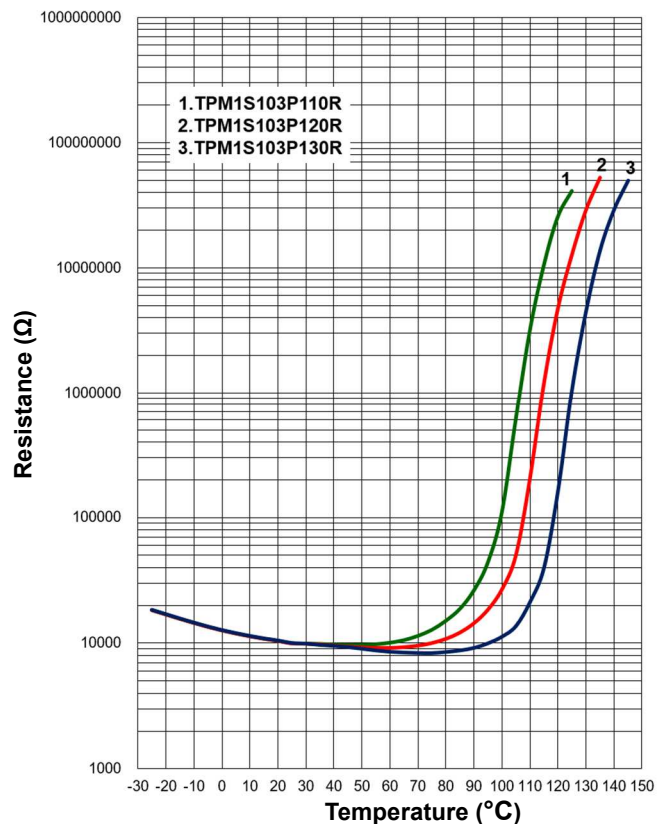

SMD 0805 R25=470Ω
TPM2S471PXXXR

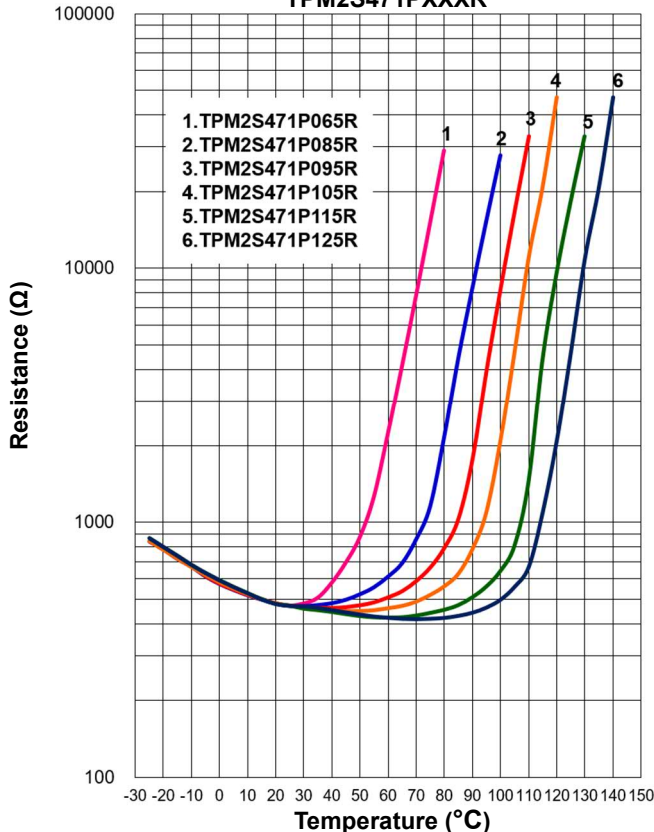

SMD 0805 R25=680Ω
TPM2S681P100R & TPM2S681P110R

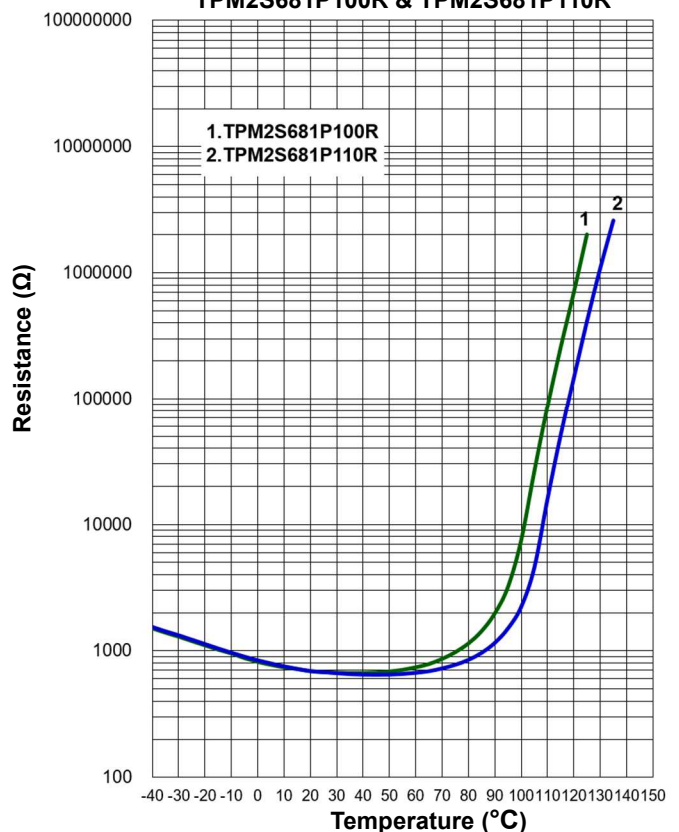

Ceramic PTC Thermistor: TPM-S Series

SMD PTC Thermistor for Temperature Sensing



■ Typical Application Circuit

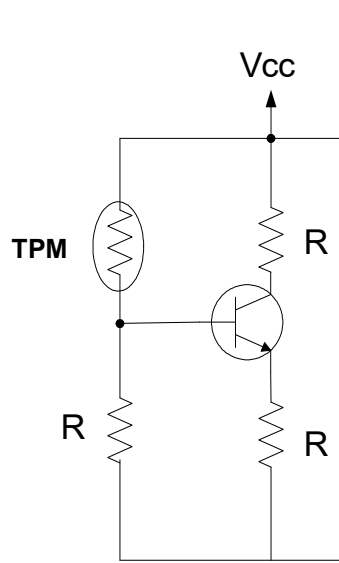


Fig 1. Overheat Protection

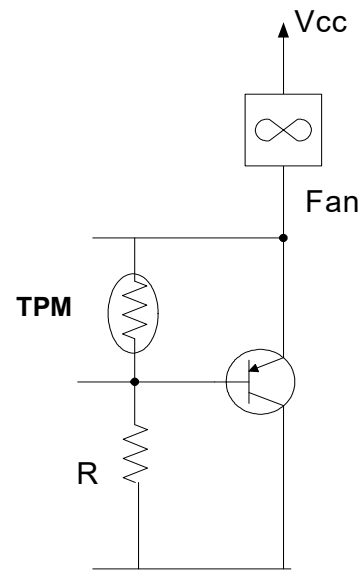


Fig 2. Temp. Sensing and Control

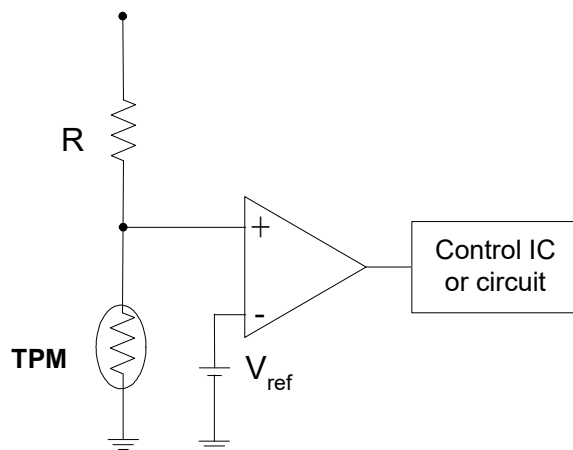


Fig 3. Comparator Circuit


Ceramic PTC Thermistor: TPM-S Series

SMD PTC Thermistor for Temperature Sensing



■ Soldering Recommendation

● IR-Reflow Soldering Profile

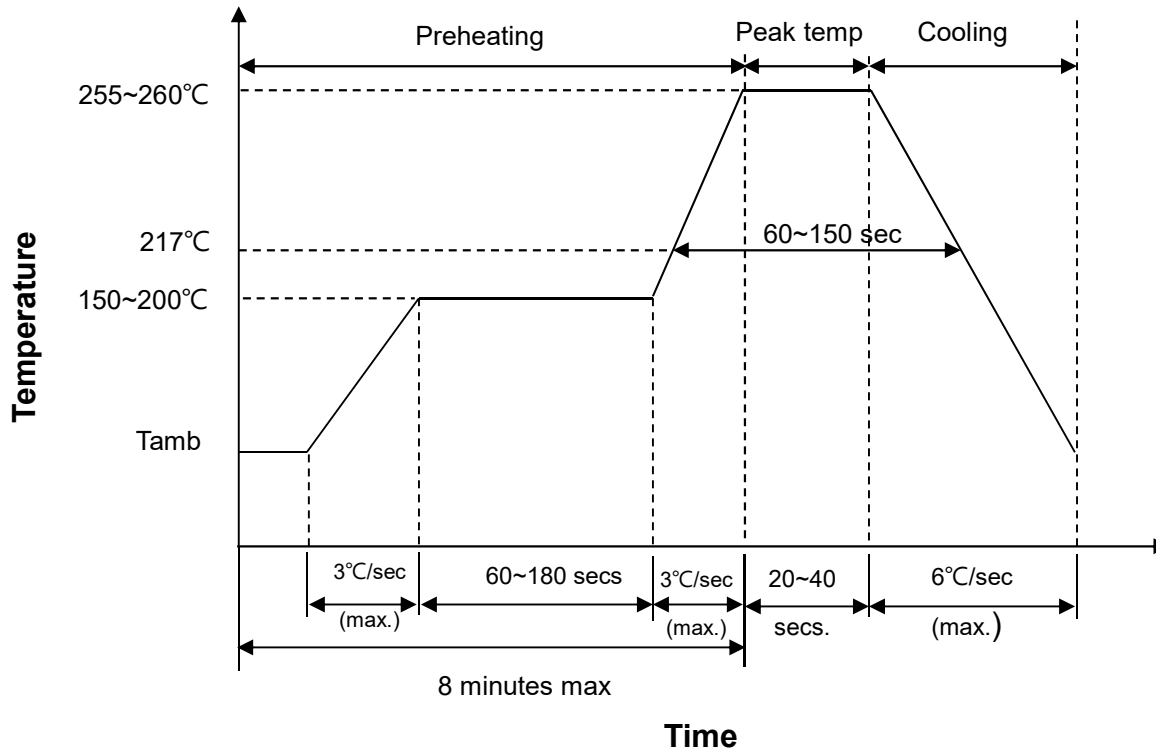

● Recommended Reworking Conditions with Soldering Iron

Item	Conditions
Temperature of Soldering Iron-tip	360°C (max.)
Soldering Time	3 sec (max.)
Diameter of Soldering Iron-tip	Φ3mm (max.)


Caution: Do not touch the component surface with soldering iron directly to prevent component damage.

Ceramic PTC Thermistor: TPM-S Series

SMD PTC Thermistor for Temperature Sensing



■ Recommended Soldering Pad Dimensions

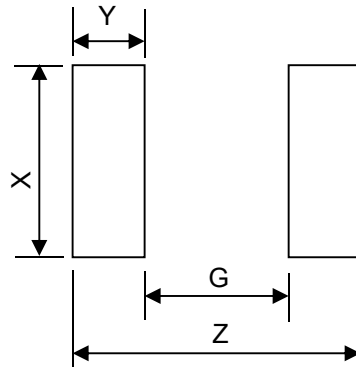


Size(EIA)	Z (mm)	G (mm)	X (mm)	Y (mm)
0402	1.4	0.4	0.5	0.5
0603	2.8	0.8	1.0	1.0
0805	3.4	1.0	1.4	1.2

Ceramic PTC Thermistor: TPM-S Series

SMD PTC Thermistor for Temperature Sensing



■ Reliability (Single sensing temperature series)

Item	Standard	Test Conditions / Methods	Specifications															
Rapid Change of Temperature	IEC 60068-2-14	<p>The conditions shown below shall be repeated 5 cycles on PCB</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Period (minutes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-25 ± 3</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>≤ 3</td> </tr> <tr> <td>3</td> <td>150 ± 2</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>≤ 3</td> </tr> </tbody> </table>	Step	Temperature (°C)	Period (minutes)	1	-25 ± 3	30 ± 3	2	Room temperature	≤ 3	3	150 ± 2	30 ± 3	4	Room temperature	≤ 3	<p>No visible damage $\Delta R_{25}/R_{25} \leq 20\%$ $(\Delta R_{25}/R_{25} \leq 30\% \text{ } ^{*1})$</p>
Step	Temperature (°C)	Period (minutes)																
1	-25 ± 3	30 ± 3																
2	Room temperature	≤ 3																
3	150 ± 2	30 ± 3																
4	Room temperature	≤ 3																
Damp Heat, Steady State	IEC 60068-2-78	40 ± 2 °C, 90 ~ 95% RH , 1000± 24 hrs	<p>No visible damage $\Delta R_{25}/R_{25} \leq 20\%$ $(\Delta R_{25}/R_{25} \leq 30\% \text{ } ^{*1})$</p>															
Bending Strength	IEC-60068-2-21	<p>Warp 2mm Speed < 0.5mm/sec. Duration: 10 sec on PCB</p> 	<p>No visible damage $\Delta R_{25}/R_{25} \leq 10\%$</p>															
High Temp. Storage	IEC 60068-2-2	Tu. ± 2°C , 1000 ± 24 hrs	<p>No visible damage $\Delta R_{25}/R_{25} \leq 20\%$ $(\Delta R_{25}/R_{25} \leq 30\% \text{ } ^{*1})$</p>															
Low Temp. Storage	IEC 60068-2-1	<p>T_L ± 3°C , 1000 ± 24 hrs (-40. ± 3°C , 1000 ± 24 hrs ^{*1})</p>	<p>No visible damage $\Delta R_{25}/R_{25} \leq 20\%$ $(\Delta R_{25}/R_{25} \leq 30\% \text{ } ^{*1})$</p>															
High Temp. Load	IEC 60738-1 7.24.3	85 ± 5°C Vmax., 1000 ± 24 hrs	<p>No visible damage $\Delta R_{25}/R_{25} \leq 20\%$ $(\Delta R_{25}/R_{25} \leq 30\% \text{ } ^{*1})$</p>															
Climatic Sequence	IEC 60738-1 7.22	<p>a. Tu. x 16 hrs b. 1st cycle : 40°C 95 %RH x 24 hrs c. T_L x 2 hrs d. 5 cycles : 40°C 95% RH x 24 hrs / Cycle</p>	<p>No visible damage $\Delta R_{25}/R_{25} \leq 20\%$ $(\Delta R_{25}/R_{25} \leq 30\% \text{ } ^{*1})$</p>															
Solderability	IEC 60068-2-58	245 ± 5°C, 3 ± 0.3 sec	At least 95% of terminal electrode is covered by new solder															
Resistance to Soldering Heat	IEC 60068-2-58	<p>8.1.2.2 Solder reflow method Preheating: 150~180°C, 60~120 secs Peak temperature: 245~255°C, ≤20 secs.(reflow)</p>	<p>No visible damage $\Delta R_{25}/R_{25} \leq 20\%$ $(\Delta R_{25}/R_{25} \leq 30\% \text{ } ^{*1})$</p>															


NOTE: *1: Apply to TPM0S103* and TPM1S103*only

Ceramic PTC Thermistor: TPM-S Series

SMD PTC Thermistor for Temperature Sensing



■ Reliability (Dual sensing temperature series)

Item	Standard	Test Conditions / Methods	Specifications															
Rapid Change of Temperature	IEC 60068-2-14	<p>The conditions shown below shall be repeated 5 cycles on PCB</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Period (minutes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-25 ± 3</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>≤ 3</td> </tr> <tr> <td>3</td> <td>150 ± 2</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>≤ 3</td> </tr> </tbody> </table>	Step	Temperature (°C)	Period (minutes)	1	-25 ± 3	30 ± 3	2	Room temperature	≤ 3	3	150 ± 2	30 ± 3	4	Room temperature	≤ 3	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 %
Step	Temperature (°C)	Period (minutes)																
1	-25 ± 3	30 ± 3																
2	Room temperature	≤ 3																
3	150 ± 2	30 ± 3																
4	Room temperature	≤ 3																
Damp Heat, Steady State	IEC 60068-2-78	40 ± 2°C, 90 ~ 95% RH, 1000± 24 hrs (85 ± 2°C, 80 ~ 85% RH, 1000± 24 hrs *1)	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 %															
Bending Strength	IEC-60068-2-21	<p>Warp 2mm Speed < 0.5mm/sec. Duration: 10 sec on PCB</p> 	No visible damage ΔR ₂₅ /R ₂₅ ≤ 10 %															
High Temp. Storage	IEC 60068-2-2	Tu. ± 2°C , 1000 ± 24 hrs (150 ± 2°C , 1000 ± 24 hrs *1)	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 %															
High Temp. Load	IEC 60738-1 7.24.3	85 ± 5°C Vmax. , 1000 ± 24 hrs	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 %															
Climatic Sequence	IEC 60738-1 7.22	<p>a. Tu. x 16 hrs b. 1st cycle: 40°C 95 %RH x 24 hrs c. TL x 2 hrs d. 5 cycles: 40°C 95% RH x 24 hrs / Cycle</p>	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 %															
Low Temp. Storage	IEC 60068-2-1	TL± 3°C, 1000 ± 24 hrs (-40 ± 3°C, 1000 ± 24 hrs *1)	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 %															
Solderability	IEC 60068-2-58	245 ± 5°C, 3 ± 0.3 sec	At least 95% of terminal electrode is covered by new solder															
Resistance to Soldering Heat	IEC 60068-2-58	<p>8.1.2.2 Solder reflow method Preheating: 150~180°C, 60~120 secs Peak temperature: 245~255°C, ≤20 secs.(reflow)</p>	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 %															

NOTE:*1 : Apply to TPM0S102* only


Ceramic PTC Thermistor: TPM-S Series

SMD PTC Thermistor for Temperature Sensing



■ Packaging


- Taping Specification (0402 type)

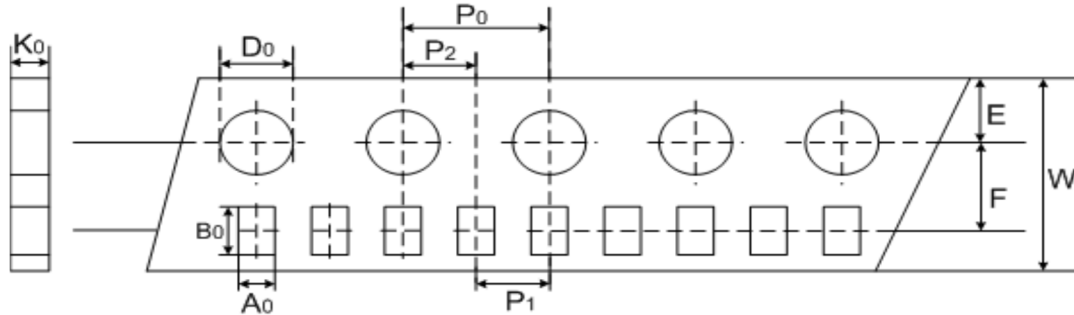

(Unit: mm)

Index	A ₀	B ₀	W	E	F	P ₁	P ₂	P ₀	D ₀	K ₀
Size	±0.05	±0.12	±0.2	±0.1	±0.05	±0.1	±0.05	±0.1	±0.1	±0.1
0402	0.62	1.12	8	1.75	3.5	2	2	4	1.55	0.60

- Taping Specification (0603 & 0805 type)

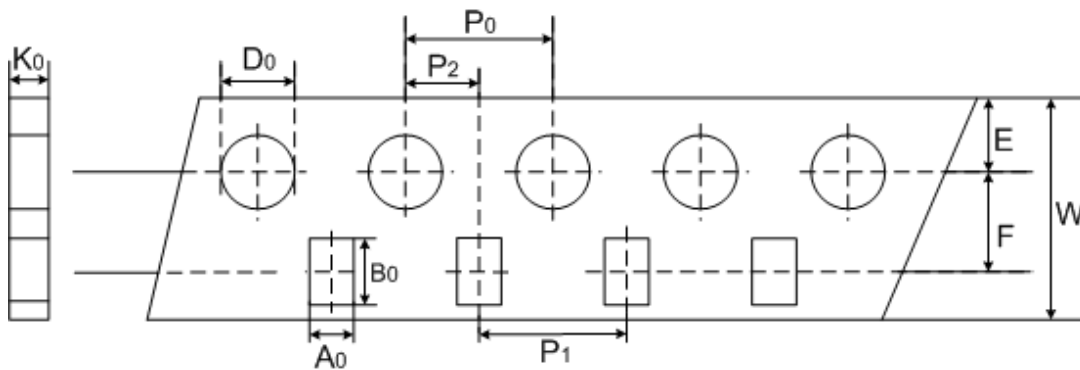

(Unit: mm)

Index	A ₀	B ₀	W	E	F	P ₁	P ₂	P ₀	D ₀	K ₀
Size	±0.2	±0.2	±0.2	±0.1	±0.05	±0.1	±0.05	±0.1	±0.1	±0.1
0603	1.1	1.9	8	1.75	3.5	4	2	4	1.55	0.95
0805	1.5	2.3	8	1.75	3.5	4	2	4	1.55	1.0


Ceramic PTC Thermistor: TPM-S Series

SMD PTC Thermistor for Temperature Sensing




Quantity

- 7" Reel

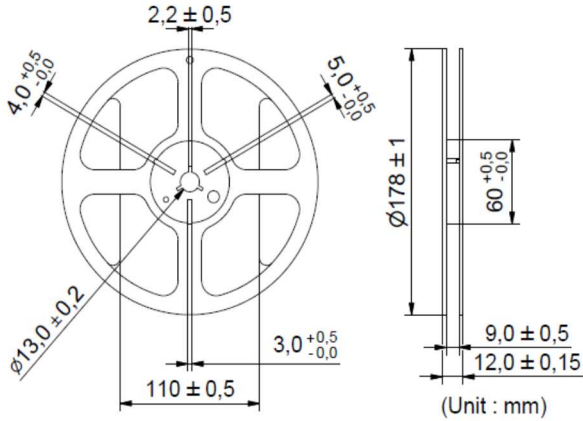

Size (EIA)	Quantity (pcs / reel)
0402	10,000
0603	4,000
0805	3,500

- 13" Reel

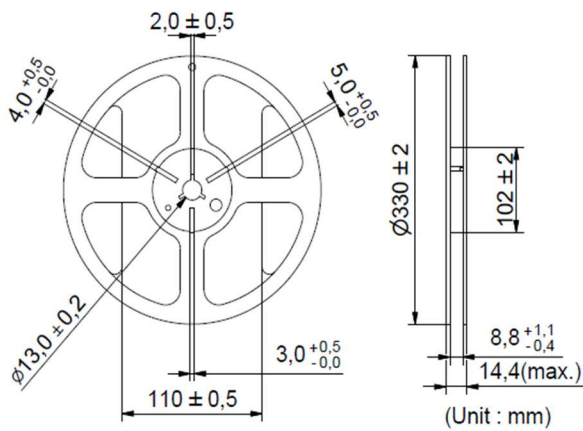

Size (EIA)	Quantity (pcs / reel)
0402	50,000
0603	16,000
0805	14,000

Warehouse Storage Conditions of Products

- Storage Conditions:
 1. Storage Temperature: -10°C ~ +40°C
 2. Relative Humidity: ≤ 75%RH
 3. Keep away from corrosive atmosphere and sunlight.
- Period of Storage: 1 year