

ESD Suppressor: LCP Series



Ultra-Low Capacitance ESD Suppressor for High-Speed Application

■ Features


1. RoHS compliant and lead-free
2. EIA size: 0402, 0603
3. Ultra-low capacitance ($<0.2\text{pF}$) and low leakage current ($<0.05\mu\text{A}$)
4. Fast response time ($<1\text{ns}$)
5. Bi-directional device
6. Rate for ESD protection and pass IEC 61000-4-2 level 4 and level X tests



■ Recommended Applications

1. High-Speed Data Lines (HDMI, Serial ATA, USB, IEEE1394)
2. Antenna Circuit (Cellular phone, GPS, etc)
3. Digital Cameras
4. Set-Top Boxes
5. Printer Ports

■ Part Number Code

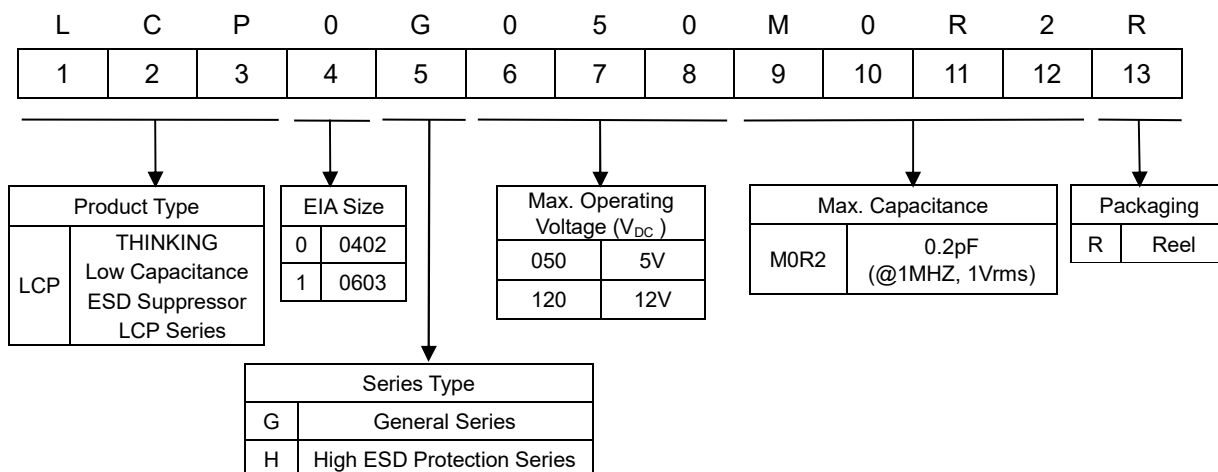


ESD Suppressor: LCP Series



Ultra-Low Capacitance ESD Suppressor for High-Speed Application

Structures and Dimensions

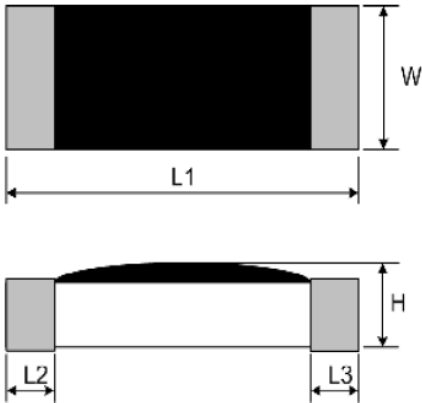

(Unit: mm)

Part No.	Size (EIA)	L1	W	H	L2 and L3
LCP0G	0402	1.00 ± 0.15	0.50 ± 0.10	0.35 ± 0.10	0.20 ± 0.10
LCP1G	0603	1.60 ± 0.15	0.80 ± 0.15	0.50 ± 0.10	0.35 ± 0.15
LCP0H	0402	1.00 ± 0.15	0.50 ± 0.10	0.40± 0.10	0.20 ± 0.10

ESD Suppressor: LCP Series



Ultra-Low Capacitance ESD Suppressor for High-Speed Application

■ Electrical Characteristics

General Series

Part No.	Size	Max. Operating Voltage	Typical Trigger Voltage (*1)	Max. Capacitance @1MHZ, 1Vrms	Clamping Voltage @8KV, 30ns (*2)		Max. Leakage Current @V _{DC}	ESD Pulse Withstand @ Contact 8KV	Insulation Resistance	Operating Temperature Range
		V _{DC} (V)	V _T (V)	C (pF)	V _c (V)		I _L (μA)	Times	R(MΩ)	(°C)
					Typical	Max.				
LCP0G3R3M0R2	0402	3.3	300	0.2	30	100	0.05	1000	>100	-40 ~ +85
LCP0G050M0R2	0402	5	300	0.2	30	100	0.05	1000	>100	-40 ~ +85
LCP0G060M0R2	0402	6	300	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP0G100M0R2	0402	10	360	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP0G120M0R2	0402	12	360	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP0G140M0R2	0402	14	390	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP0G150M0R1	0402	15	390	0.1	50	100	0.05	1000	>100	-40 ~ +85
LCP0G150M0R2	0402	15	390	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP0G180M0R2	0402	18	390	0.2	50	100	0.05	500	>100	-40 ~ +85
LCP0G200M0R2	0402	20	420	0.2	50	100	0.05	500	>100	-40 ~ +85
LCP0G240M0R2	0402	24	420	0.2	50	100	0.05	500	>100	-40 ~ +85
LCP0G300M0R2	0402	30	450	0.2	50	100	0.05	500	>100	-40 ~ +85
LCP1G3R3M0R2	0603	3.3	300	0.2	30	100	0.05	1000	>100	-40 ~ +85
LCP1G050M0R2	0603	5	300	0.2	30	100	0.05	1000	>100	-40 ~ +85
LCP1G060M0R2	0603	6	300	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP1G100M0R2	0603	10	360	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP1G120M0R2	0603	12	360	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP1G140M0R2	0603	14	390	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP1G150M0R2	0603	15	390	0.2	50	100	0.05	1000	>100	-40 ~ +85
LCP1G180M0R2	0603	18	390	0.2	50	100	0.05	500	>100	-40 ~ +85
LCP1G200M0R2	0603	20	420	0.2	50	100	0.05	500	>100	-40 ~ +85
LCP1G240M0R2	0603	24	420	0.2	50	100	0.05	500	>100	-40 ~ +85

High ESD Protection Series

Part No.	Size	Max. Operating Voltage	Typical Trigger Voltage (*1)	Max. Capacitance @1MHZ, 1Vrms	Clamping Voltage @8KV, 30ns (*2)		Max. Leakage Current @V _{DC}	ESD Pulse Withstand @ Contact 15KV	Insulation Resistance	Operating Temperature Range
		V _{DC} (V)	V _T (V)	C (pF)	V _c (V)		I _L (μA)	Times	R(MΩ)	(°C)
					Typical	Max.				
LCP0H050M0R2	0402	5	300	0.2	30	100	0.05	100	>100	-40 ~ +85
LCP0H120M0R2	0402	12	360	0.2	50	100	0.05	100	>100	-40 ~ +85
LCP0H150M0R2	0402	15	390	0.2	50	100	0.05	100	>100	-40 ~ +85

Note 1: Typical Trigger Voltage (V_T) follows IEC 61000-4-2, Level 4 and maximum peak voltage shall be measured after initiation of pulse.

Note 2: Clamping Voltage (V_c) follows IEC 61000-4-2, Level 4 and voltage value shall be measured at 30ns after initiation of pulse.


ESD Suppressor: LCP Series



Ultra-Low Capacitance ESD Suppressor for High-Speed Application

■ Soldering Recommendation

● IR-Reflow Soldering Profile

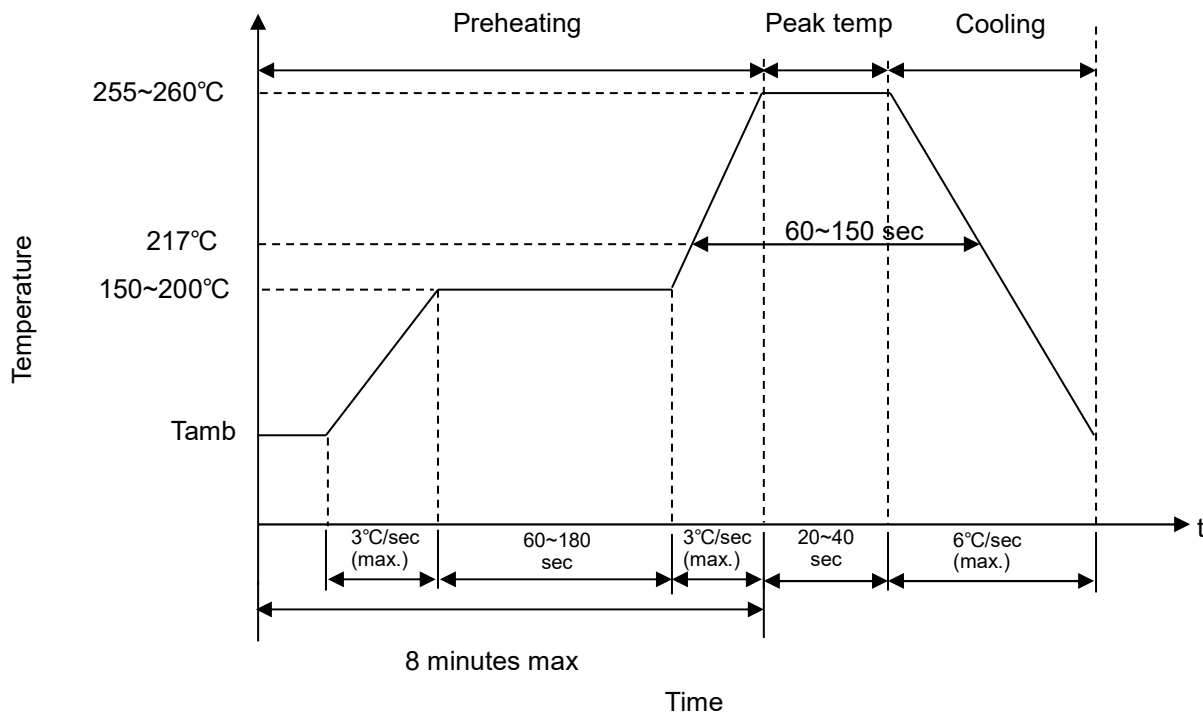


■ Recommended Reworking Conditions with Soldering Iron

Item	Conditions
Temperature of Soldering Iron-tip	360°C (max.)
Soldering Time	3 sec (max.)
Diameter of Soldering Iron-tip	Φ3mm (max.)

Caution: Please do not directly touch the component surface with soldering iron to avoid its damage.

■ Recommended Soldering Pad Dimensions



Size (EIA)	Z (mm)	G (mm)	X (mm)	Y (mm)
0402	1.4	0.4	0.5	0.5
0603	2.8	0.8	1.0	1.0

ESD Suppressor: LCP Series




Ultra-Low Capacitance ESD Suppressor for High-Speed Application

Electrostatic Discharge-ESD Reliability

Severity Level	Discharge Voltage	Initial Current	30 ns Current	60 ns Current
1	2 kV	7.5 A	4A	2A
2	4 kV	15.0 A	8A	4A
3	6 kV	22.5 A	12A	6A
4	8 kV	30.0 A	16A	8A

* Follow IEC61000-4-2

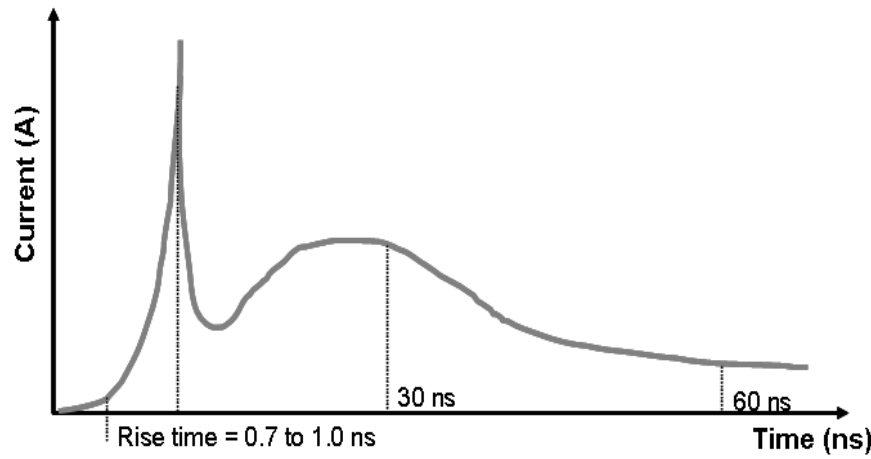

Reliability

Item	Standard	Test conditions / Methods	Specifications		
Resistance to Soldering Heat	IEC 60068-2-58	260 ± 5°C, 10 ± 1 sec	I _L ≤10μA No visible damage		
High Temperature Load	MIL-STD-202 Method 108	85 ± 2°C, 1000±24 hrs at V _{DC}	I _L ≤10μA No visible damage		
Damp Heat Load, Steady State	IEC 60068-2-78	40±2°C, 90-95%RH, 1000±24hrs, at V _{DC}	I _L ≤10μA No visible damage		
Rapid Change of Temperature	IEC 60068-2-14	The conditions shown below shall be repeated 5 cycles on PCB		I _L ≤10μA No visible damage	
		Step	Temperature (°C)		Period (minutes)
		1	-40 ±5		30 ±3
		2	Room temperature		5 ±3
		3	85 ±5		30 ±3
		4	Room temperature		5 ±3


ESD Suppressor: LCP Series



Ultra-Low Capacitance ESD Suppressor for High-Speed Application


■ Packaging

● Taping Specification (0402 types)

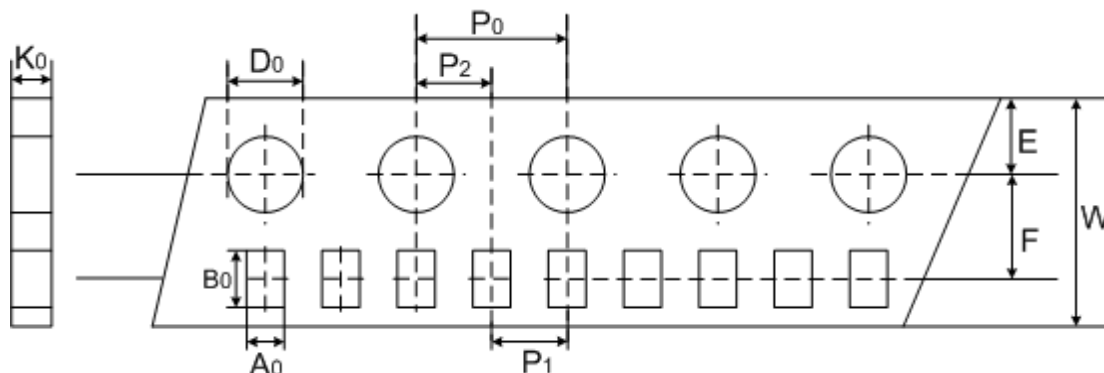

Index Type	A ₀	B ₀	W	E	F	P ₁	P ₂	P ₀	D ₀	K ₀
0402	±0.05	±0.12	±0.2	±0.1	±0.05	±0.1	±0.05	±0.1	±0.1	±0.1

● Taping Specification (0603 type)

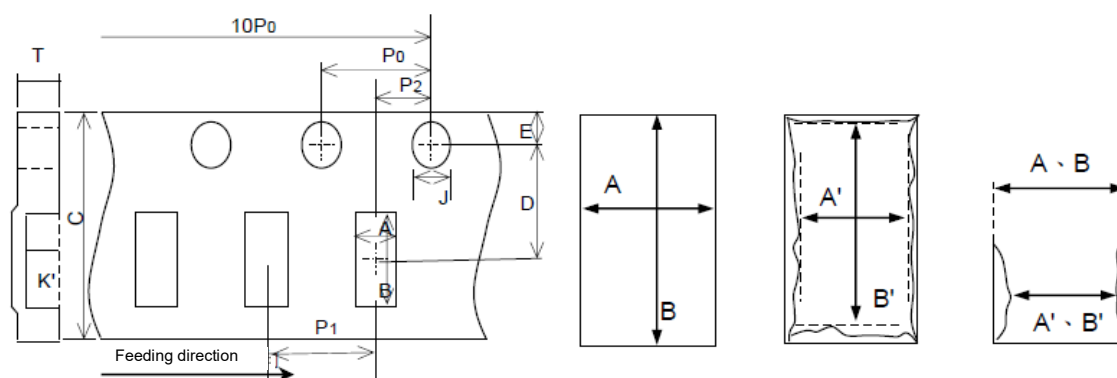


Index Type	A	B	C	D	E	P ₀	P ₁	P ₂	J	K'	T	10P ₀
0603	±0.05	±0.05	±0.01	±0.05	±0.1	±0.1	±0.1	±0.05	±0.05	±0.03	±0.05	±0.1

ESD Suppressor: LCP Series




Ultra-Low Capacitance ESD Suppressor for High-Speed Application

■ Quantity

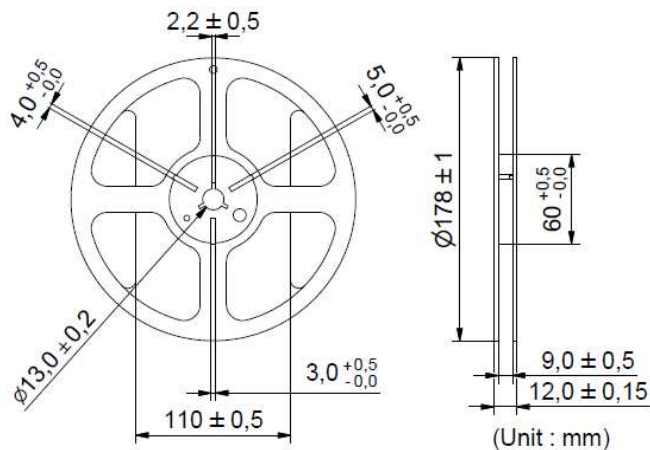

● Reel Packaging

Type	Quantity (pcs/reel)
0402	10,000
0603	4,000

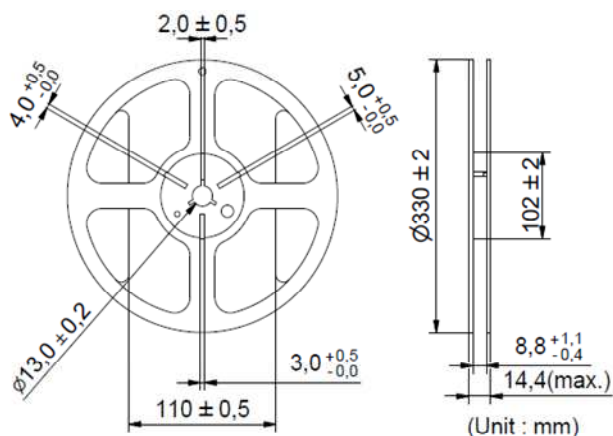

● Reel Packaging

Type	Quantity (pcs/reel)
0402	50,000
0603	16,000

■ Warehouse Storage Conditions of Products

● Storage Conditions :

1. Storage Temperature : -10°C~+40°C
2. Relative Humidity : ≤ 75 % RH
3. Keep away from corrosive atmosphere and sunlight.

● Period of Storage: 1 year